
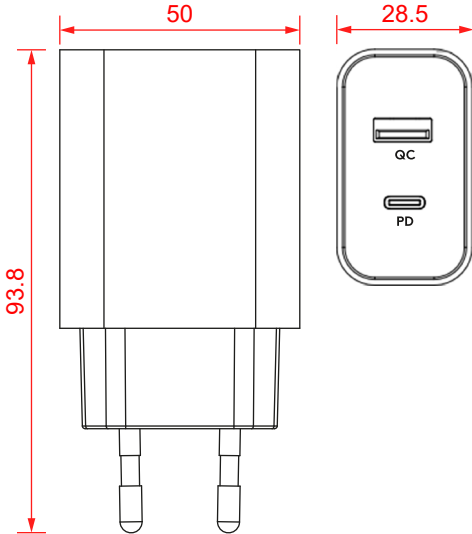
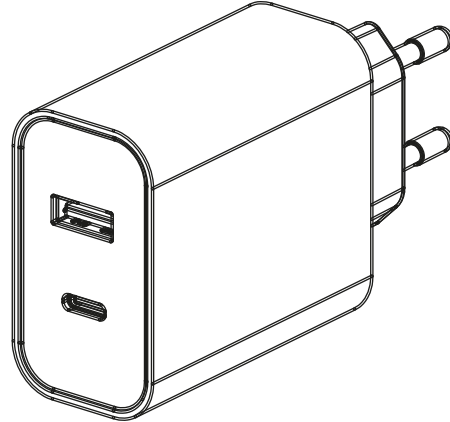




	1	2	3	4	5	6	7	8	9	10	11	12	13	14																									
A	Art.-Nr. / Item No.		Farbe / Colour												A																								
	61755		schwarz / black																																				
	61756		weiß / white																																				
B																			B																				
C																								C															
D																													D										
E																													E										
F				<p>Dual-USB-Schnellladegerät USB/QC 3.0 (45 W)</p> <ul style="list-style-type: none"> - dank hoher Leistung universell einsetzbar und geeignet für Smartphones, Notebooks etc. - Eingangsspannungsbereich von 100-240 V ermöglicht Einsatz weltweit - kompakte Bauform <p>Anschlüsse: Eurostecker (Typ C, CEE 7/16), USB-A-QC-Buchse (Quick Charge), USB-C™-PD-Buchse (Power Delivery)</p> <p>Eingang: 100-240 V ~, 50/60 Hz, 1,5 A</p> <p>Ausgang USB-C™ PD: 5,0 V ===, 3,0 A, 15,0 W; 9,0 V ===, 3,0 A, 27,0 W; 12,0 V ===, 3,0 A, 36,0 W; 15,0 V ===, 3,0 A, 45,0 W; 20,0 V ===, 2,25 A, 45,0 W</p> <p>Ausgang USB-A QC: 5,0 V ===, 3,0 A, 15,0 W; 9,0 V ===, 2,0 A, 18,0 W</p> <p>Ausgang gesamt: 45,0 W max. Ø Effizienz im Betrieb: 85,7 % Effizienz bei geringer Last (10%): 80,3 % Leistungsaufnahme bei Nulllast: 0,17 W Schutzklasse: II Gewicht: 118 g</p>																F																			
G																			G																				
H																			H																				
I																			I																				
J	<p>Änderungen</p> <table border="1"> <thead> <tr> <th>Datum</th><th>Name</th><th>gez.:</th><th>Datum</th><th>Name</th></tr> </thead> <tbody> <tr> <td></td><td></td><td>gez.:</td><td>31.01.2023</td><td>ir</td></tr> <tr> <td></td><td></td><td>gepr.:</td><td>31.01.2023</td><td>aw</td></tr> <tr> <td></td><td></td><td>Norm:</td><td></td><td></td></tr> </tbody> </table> <p>Änderungen vorbehalten / Subject to change</p>			Datum	Name	gez.:	Datum	Name			gez.:	31.01.2023	ir			gepr.:	31.01.2023	aw			Norm:			<p>Dual-USB Quick Charger USB/QC 3.0 (45 W)</p> <ul style="list-style-type: none"> - thanks to its high performance, it can be used universally and is suitable for smartphones, notebooks, etc. - input voltage range of 100-240 V allows use worldwide - compact design <p>Connectors: Euro plug (Typ C, CEE 7/16), USB-A QC (Quick Charge) socket, USB-C™ PD (Power Delivery) socket</p> <p>Input: 100-240 V ~, 50/60 Hz, 1.5 A</p> <p>Output USB-C™ PD: 5.0 V ===, 3.0 A, 15.0 W; 9.0 V ===, 3.0 A, 27.0 W; 12.0 V ===, 3.0 A, 36.0 W; 15.0 V ===, 3.0 A, 45.0 W; 20.0 V ===, 2.25 A, 45.0 W</p> <p>Output USB-A QC: 5.0 V ===, 3.0 A, 15.0 W; 9.0 V ===, 2.0 A, 18.0 W</p> <p>Total Output: 45.0 W max. Average active efficiency: 85.7 % Efficiency at low load (10 %): 80.3 % Power consumption at no load: 0.17 W Protection class: II Weight: 118 g</p>					<p>Bezeichnung TRA USB 45W 2 Port USB/USB-C PD  sw/ws PL</p> <p>Blatt 1/1</p> <p>Zeichnungs-Nr.: 61755, 61756</p> <p>von</p>										J
Datum				Name	gez.:	Datum	Name																																
					gez.:	31.01.2023	ir																																
					gepr.:	31.01.2023	aw																																
		Norm:																																					
	1	2	3	4	5	6	7	8	9	10	11	12	13	14																									