


**1****Jumpwire
Draadbrug
Pontage**

◇ J



**MK166
SCHEMA / DIAGRAM /
ESQUEMA / SCHALTPLAN:
WWW.VELLEMAN.BE**

2

**Resistor - Weerstand -
Résistance - Widerstand -
Resistencia - Motstand -
Vastus - Resistenze**

◇ R1... R3: 100K

◇ R4 : 10

◇ R5, R6 : 10K

◇ R7 : 82K

◇ R8, R9 : 1K

◇ R10, R11 : 68

(Brown, Black, Yellow) - (Bruin, zwart, Geel) - (Brun, noir, Jaune) - (Braun, Schwarz, Gelb) - (Brun, Svart, Gul) - (Ruskea, Musta, Keltainen) - (Marrón, Negro, Amarillo) - (Castanho, Preto, Amarelo) - (Marrone, Nero, Giallo)

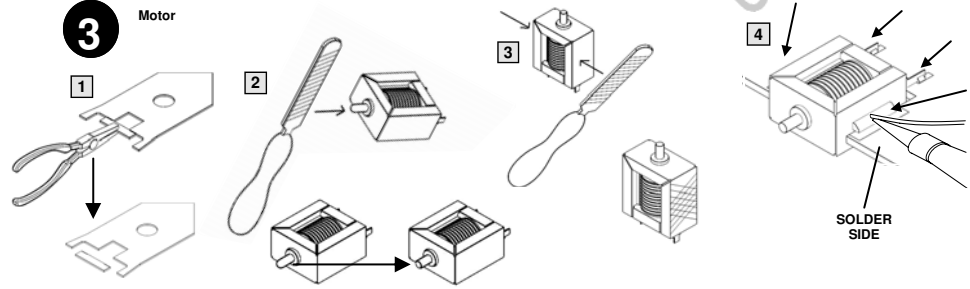

(Brown, Black, Black) - (Bruin, zwart, zwart) - (Brun, Noir, Noir) - (Braun, Schwarz, Schwarz) - (Brun, Svart, Svart) - (Ruskea, Musta, Musta) - (Marrón, Negro, Negro) - (Castanho, Preto, Preto) - (Marrone, Nero, Nero)

(Brown, Black, Orange) - (Bruin, zwart, Oranje) - (Brun, noir, Orange) - (Braun, Schwarz, Orange) - (Brun, Svart, Oranje) - (Ruskea, Musta, Oranssi) - (Marrón, Negro, Naranja) - (Castanho, Preto, Laranja) - (Marrone, Nero, Aranciato)


(Grey, Red, Orange) - (Grijs, Rood, Oranje) - (Gris, Rouge, Orange) - (Grau, Rot, Orange) - (Grå, Röd, Orange) - (Harmaa, Punainen, Oranssi) - (Gris, Rojo, Naranja) - (Cinzeno, Encarnado, Laranja) - (Grigio, Rosso, Aranciato)

(Brown, Black, Red) - (Bruin, zwart, Rood) - (Brun, Noir, Rouge) - (Braun, Schwarz, Rot) - (Brun, Svart, Röd) - (Ruskea, Musta, Punainen) - (Marrón, Negro, Rojo) - (Castanho, Preto, Encarnado) - (Marrone, Nero, Rosso)


(Blue, Grey, Black) - (Blauw, Grijs, Zwart) - (Bleu, Gris, Noir) - (Blau, Grau, Schwarz) - (Blå, Grå, Svart) - (Sininen, Harmaa, Musta) - (Azul, Gris, Negro) - (Azul, Cinzeno, Preto) - (Blu, Grigio, Nero)

3 **Motor****SOLDER
SIDE****4** **Diode**


◇ D1 : 1N4148

5 **IC socket**


◇ IC1 : 8p

6 **Ceramic capacitor**

◇ C1 : 100nF (104)
◇ C2 : 100nF (104)


7 **Switch**

◇ SW1 (ON/OFF)


8**Electrolytic capacitor**

Watch the polarity!
Attention à la polarité!


◇ C4 : 100µF

9**Transistor**

◇ T1: BC547B
◇ T2: BC547B
◇ T3: BC547B

10**Microphone**

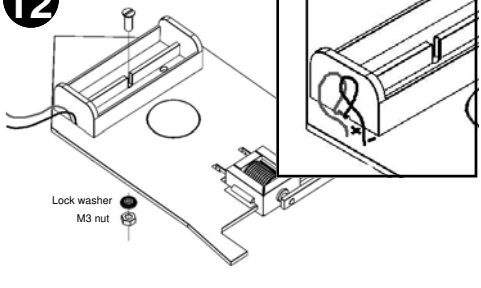
◇ MIC1

11**Trimmer**


◇ RV1 : 100K (sensitivity)

12

M3 bolt 6mm




Lock washer
M3 nut

13**Electrolytic capacitor**

Watch the polarity!
Attention à la polarité!

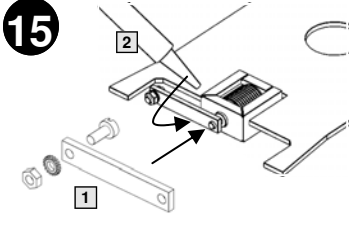
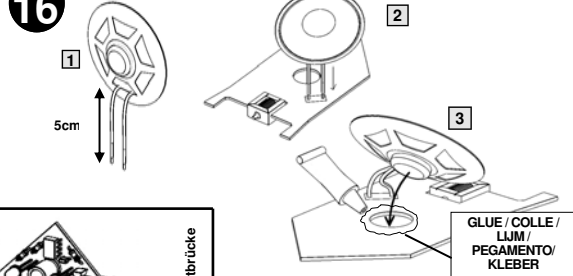
◇ C3 : 100µF

14**LED**



Watch the polarity!
Att. la polarité!

24 mm


◇ LD1
◇ LD2

15**16****Loudspeaker**


GLUE / COLLE /
LIJM /
PEGAMENTO /
KLEBER

17**18**

Jumpwire Draadbrug Pontage Drahtbrücke

19 **IC**

◇ IC : VMK166

**2x AAA
Battery**

MK166 Manual edition 1