


NO	Product name	MODEL SPECIFICATION	Remarks
1	PE040605	H05VV-F 3x0.75mm2*0.5m	Black
2	PE040610	H05VV-F 3x0.75mm2*1m	Black
3	PE040612	H05VV-F 3x0.75mm2*1.2m	Black
4	PE040618	H05VV-F 3x0.75mm2*1.8m	Black
5	PE040620	H05VV-F 3x0.75mm2*2m	Black
6	PE040630	H05VV-F 3x1.0mm2*3m	Black
7	PE040650	H5VV-F 3x1.0mm2*5m	Black
8	PE040670	H05VV-F 3x1.0mm2*7m	Black
9	PE0406100	H05VV-F 3x1.0mm2*10m	Black

Notes:

- Cable: H05VV-F 3G0.75mm² Jacket $\phi 6.5 \pm 0.1$ Conductor 24*0.198
H05VV-F 3G1.0mm² Jacket $\phi 7.0 \pm 0.1$ Conductor 32*0.198
- Mark: <VDE> H05VV-F 3G0.75mm² SHANGYU JINTAO ELECTRON CO., LTD
<VDE> H05VV-F 3G1.0mm² SHANGYU JINTAO ELECTRON CO., LTD
- Test: Hi-pot: Inner Voltage AC2500V/1S External Voltage AC4500V/1S
current leakage 1mA, insulation resistance no less than 50M Ω , no strike out;

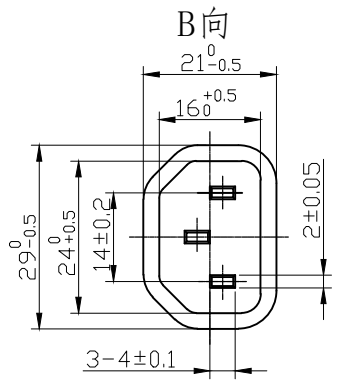

5.		ACCORDING	DIN VDE 0620 - 1		MATERIAL	PVC	
4.			IEC60320		RATED	16A 250V ~ /10A 250V ~	
3.	JT-ST3	DRAWER		EDITION	A4	Dr.No.	
2.	WIRE	REVIEW				COLOR	
1.	JT-SZ3 Plug to the European standard	APPROVE	Zhang	2019-7-8		ALL DIMENSIONS IN mm	
PART	DESCRIPTION	DO NOT SCALE	DATE				